

FINO

task lighting



UNDER-CABINET LIGHTING WILL NEVER LOOK THE SAME

Fino offers endless possibilities with even, bright illumination, the flexibility to install everywhere and the environmental responsibility of LEDs.

The high quality of Fino's light output is by design — the precision engineered optics feature polished, acrylic lenses coupled with the most advanced LEDs available. Fino is the only fixture to exceed the rigorous requirements of the ENERGY STAR® program and its optional occupancy sensor and continuous range dimming from 100% to 5% offer even more energy savings.

Fino allows you to daisy chain up to 5 two-foot units and control each fixture independently or from a master switch — the choice is yours. Fino — a new beginning in LED under-cabinet lighting.




Let work
come to Life.™

Workrite
ergonomics®

FINO™

task lighting



- Three lengths: 24", 36", 48" (nominal)
- Ultra-slim 1" x 3/4" profile, rotates +/-30°
- One touch controls with continuous range dimming to 5%
- Daisy chain units can be controlled individually within chain
- Available in 3 colors: Winter, Sterling and Carbon
- Custom colors with no upcharge, 200 minimum
- Magnetic rotating and fixed mounts for rapid install, wood shelf rotating and fixed mounts included
- All mounts allow for sliding lateral adjustment
- Meets DOE Ergonomics Guidelines and IESNA RP-1-04 section 2.3 requirements for task lighting illuminance levels
- Color temperature: 3500K, CRI: 85
- 50,000 hour, 20 year lifetime LEDs
- UL listed, cUL listed
- 10 year warranty



Available in three lengths, 24", 36" and 48" and three standard colors.



One touch on/off and continuous range dimming.



Passive infrared Occupancy Sensor controls single unit or daisy chain.



Wiring & electrical:

- LED Wattage: 24" 8.2 W, 36" 12.3 W, 48" 16.4 W
- Occupancy Sensor controls entire chain only and must connect to Master Switch provided with "ODC" models, one per chain
- Master Switch connects to transformer with 54" cord and to first fixture with 1" jumper cord provided
- Passive infrared (PIR) Occupancy Sensor rotates 360°, 10' effective range
- Can daisy chain up to 10' nominal fixture (e.g. qty. 2, 24" nominal and qty. 2, 48" nominal)
- Specify 1", 12", 24" or 48" jumper cord for daisy chain units


Environmental considerations:

- Standby power <0.8W per fixture
- Exceeds ENERGY STAR® requirements for lumens per watt; credential in process
- CA Title 24 compliant with Occupancy Sensor
- Fixture power consumption reduced 44% when dimmed to 50% illumination
- Post-consumer recycled packaging, bulk packaging optional
- Aluminum housing is fully recyclable
- Finish is VOC free water-based paint
- LEED credit eligibility (1-8 points)
 - Energy & Atmosphere, EA Credit 1.1
 - Optimize energy performance: lighting power (1-3 points)
 - Energy & Atmosphere, EA Credit 1.2
 - Lighting controls (1 point)
- Innovation & Design Process, ID Credit 1.1-1.4
 - Implementation of comprehensive ergonomic program (1-4 points)

Specifications: Lengths

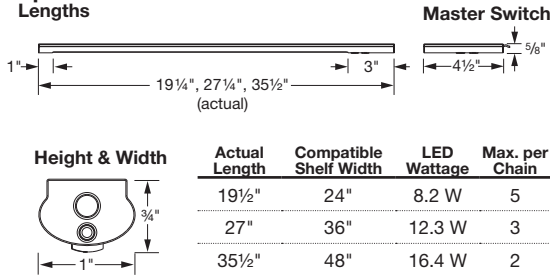

Occupancy Sensor

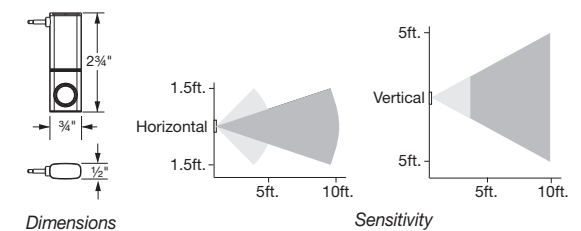

Occupancy Sensor	Daisy Chain	Fixture Length	Model #	Color ⁽¹⁾	Weight
Yes	'Parent'*	24	FIN-24-P-ODC-	<input type="checkbox"/>	2
		36	FIN-36-P-ODC-	<input type="checkbox"/>	3
		48	FIN-48-P-ODC-	<input type="checkbox"/>	4
	Not Daisy Chain	24	FIN-24-P-OCC-	<input type="checkbox"/>	2
		36	FIN-36-P-OCC-	<input type="checkbox"/>	3
		48	FIN-48-P-OCC-	<input type="checkbox"/>	4
No	'Parent' or Not Daisy Chain	24	FIN-24-P-	<input type="checkbox"/>	2
		36	FIN-36-P-	<input type="checkbox"/>	3
		48	FIN-48-P-	<input type="checkbox"/>	4

Transformer: 2 amp, class 2, 24V, 4 5/8" x 2 1/2" x 1 1/2", 2 prong plug on 60" cord connects to transformer and 54" cord with barrel connector plug to fixture.

* Includes Master Switch with 1" connector to first fixture in chain

Add on Jumper Units (no transformer)

Daisy Chain	Fixture Length	Model #	Cord Length ⁽²⁾	Color ⁽¹⁾	Weight
'Child'	24	FIN-24-J-	<input type="checkbox"/>	<input type="checkbox"/>	2
	36	FIN-36-J-	<input type="checkbox"/>	<input type="checkbox"/>	3
	48	FIN-48-J-	<input type="checkbox"/>	<input type="checkbox"/>	4

(1) Colors: **W**-Winter, **S**-Sterling, **C**-Carbon

(2) Daisy Chain Cord Lengths: **0.1** - 1", **1.2** -12", **2.4** -24", **4.8** -48"

Mixed Daisy Chain Configurations

Number of fixtures within same chain

FIN-24	FIN-36	FIN-48	Total per Chain
1	1		2
1		1	2
	1	1	2
1	1	1	3
1	2		3
1		2	3
2	1		3
2		1	3
	2	1	3
2	2		4
3	1		4
		1	4

Listed to left are all possible configurations of mixed size fixtures within a single daisy chain. Refer to the chart below under 'Specifications' for maximum number of the same sized fixtures per daisy chain.

Photometrics

Source at 18"

inches	18	12	6	0	6	12	18
12	3	7	11	11	9	6	3
6	16	65	106	138	126	79	28
0	34	92	151	191	168	118	60
6	27	79	132	173	146	100	50
12	5	28	65	72	71	43	15

Model # tested: FIN-36, average illuminance 81 footcandles



Workrite Ergonomics, Inc. 1450 Technology Lane, Petaluma, CA 94954
www.workriteergo.com 800.959.9675

©2011 Workrite Ergonomics | All referenced company and product names are trademarks, registered trademarks or copyrights of their respective holders.

1400227-0711 Subject to change without notice.

Workrite
ergonomics®